




MS818-2C MS818-1C MS818-1S




Default cam S1C7200




Optional cam S2C2500  
S2C2000




Optional cam S3C8800

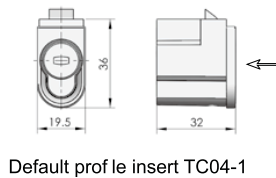


Default profile insert TC04-1

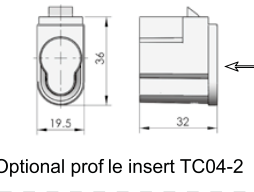


Optional profile insert TC04-2

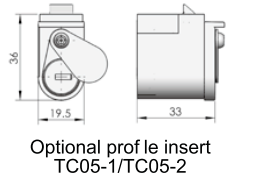

Optional profile insert  
TC05-1/TC05-2

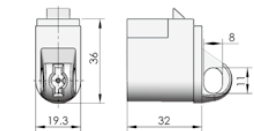

Optional profile insert TC06-1

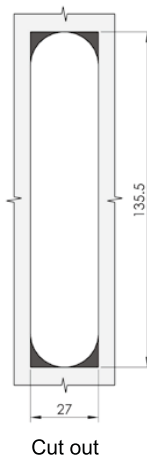

Cut out



Remark: Change the fitting position or angle of position device and cam to realize LH or RH application

MS818



MS818-1S



MS818-1C



MS818-2C



Main material and finish: Black powder coated aluminium-alloy housing and ZDC handle, bright chrome plated ZDC profile insert, white zinc plated steel support and cam  
Application: Quick-open, easy assembling, one-point locking or three-point locking function will be achieved with different cam mounted on  
Remark : Default profile insert TC04-1, Default key K040

Default cam: S1C72Y00002

Performance parameter:

MS818-1S:

Handle load tension capability:  $\phi$ 250N

Handle load torque capability:  $\phi$ 30N.m

MS818-1C/2C:

Handle load tension capability:  $\phi$ 430N

Handle load torque capability:  $\phi$ 25N.m

Max static load : 300N

Program	ERP	
	Black powder coated	Nanometer painted
MS818-1C	MS818Z1A040001	MS818A2B040001
MS818-2C	MS818A1A040003	MS818A2B040003
MS818-1S	MS818Z1A040003	MS818Z2B040003

Accessories

Electronic lock

Handle lock

Cylinder lock

Plane lock

Rod control lock

Panel lock

Toggle and hook

Handles

Door stop

Hinge

Seal gasket