



Use key to open the lock, without password

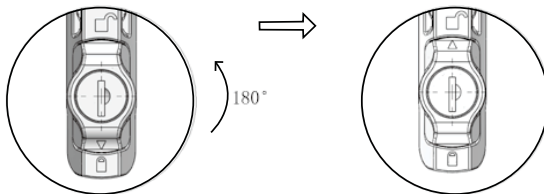

Enter password to open the lock, open lock with password instead of key, original password: "0,0,0"

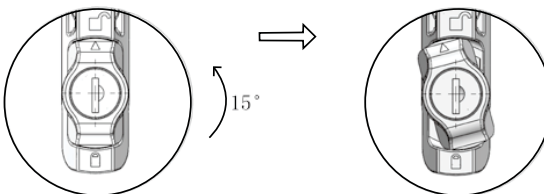


Change the password (when it is correct), when knob indicates opening position, anti-clockwise rotation 15 degree to change the password

ERP

MS861N00140001

Remark: Default cam S3B4510 (Optional cam 8*8)

MS861-2A



Main material and finish: Black PA housing, handle and knob, white zinc-plated steel cam and support

Application: Refer to instruction along with product

Remark: Default key K140

Default cam: 2882451017

Performance parameter:

Handle load tension capability: $\phi 60\text{N}$

Handle load torque capability: $\phi 5\text{N.m}$

Maximum static load: 300N

Accessories

Electronic lock

Handle lock

Cylinder lock

Plane lock

Rod control lock

Panel lock

Toggle and hook

Handles

Door stop

Hinge

Seal gasket